


**FOUR
STROKE
MARINE
ENGINES**

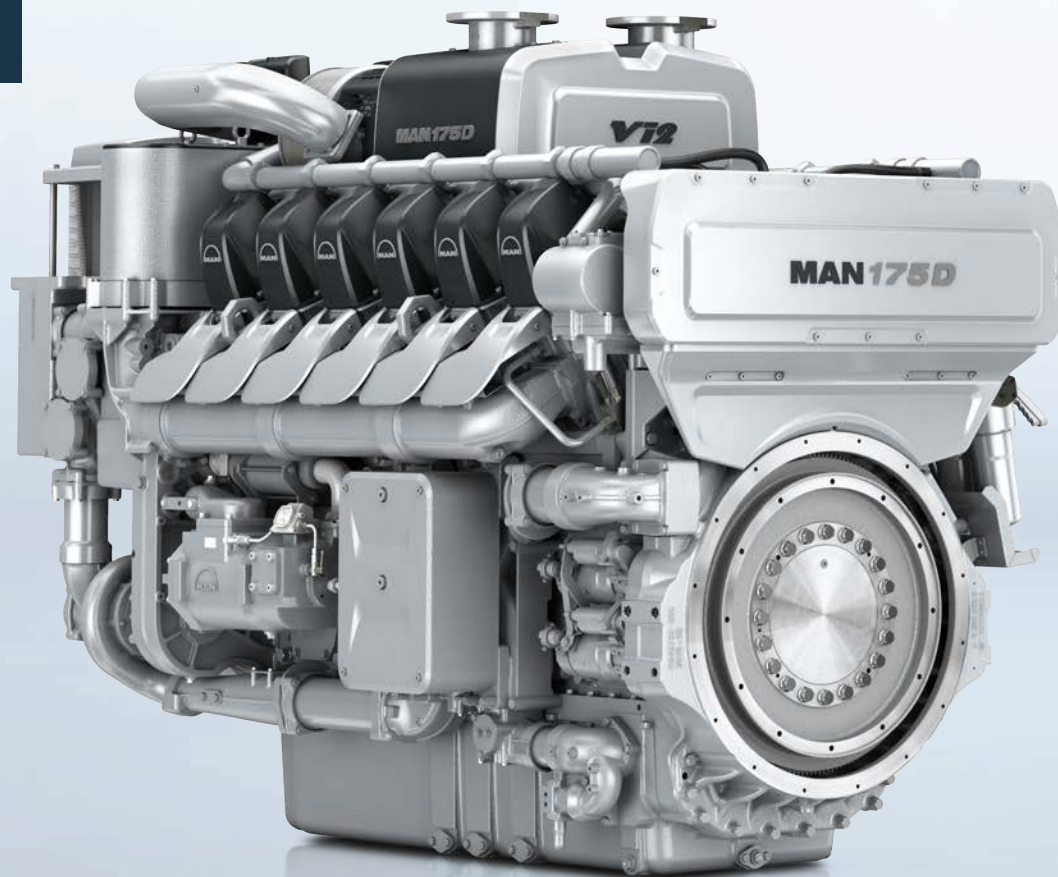

MAN 175D

PROPULSION

Packing the latest technology into a minimum volume, the MAN 175D is characterized by a clear-cut design: easy to commission, easy to operate, and easy to service. Its modular design allows it to meet all the challenges of many different applications.

Benefits at a glance

- Clear & Compact
- Advanced & Robust
- Powerful & Reliable
- Efficient & Clean


Engineering the Future – since 1758.

MAN Diesel & Turbo



MAN 175D

PROPULSION

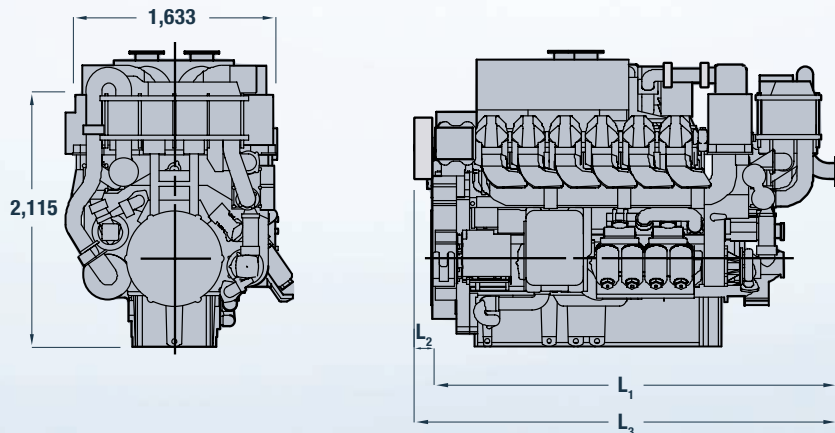

Dimensions

Cyl. No.	12
L ₁	2,678 mm
L ₂	334 mm
L ₃	3,012 mm
Dry mass	8.5 t

Output

Engine Model	MAN 12V175D-MH	MAN 12V175D-MM
Rating Definitions	Heavy Duty	Medium Duty
kW	1,740	2,220
rpm	1,800	1,900
SFOC at 100 % MCR	-	199
SFOC at 75 % MCR	-	203

For multi-engine arrangement only. Rated power output according to ISO 3046-1:ICFN. Specific fuel oil consumption acc. to ISO 3046-1:2002 based on a lower calorific value of fuel 42,700 kJ/kg with attached lube oil, HT and LT-cooling water pumps fulfilling IMO. Tier II emission limitations with 5% tolerance. Status August 2016

General

- Modular Common Rail fuel injection system
- Integrated lubrication system
- HT and LT split cooling circuits with integrated pumps and thermostats
- High efficiency MAN turbochargers
- Engine mounted control devices and operating panel

Power-to-weight-ratio (MCR)

- 3.9 to 5.9 kg/kW

Starting method

- Electric or Compressed Air

Optional equipment

- Integrated seawater cooler and engine-driven seawater pump
- Lube oil centrifuge for longer lube oil exchange intervals
- 100% PTO on counter coupling side
- Alternator for battery charging
- Up to four auxiliary PTO connections

MCR = maximum continuous rating | SCR = Selective Catalytic Reduction | SFOC = Specific Fuel Oil Consumption

Compliance with emission regulations

- IMO Tier II
- IMO Tier III (with MAN SCR)

Rating definitions:

- **Marine Heavy Duty**
Recommended for vessels with typical annual operating time of up to 5,000 hours
Typical applications include, but are not limited to working boats, offshore vessels and ferries
Average load: up to 85 %
- **Marine Medium Duty**
Recommended for vessels with typical annual operating time of up to 3,000 hours
Typical applications include, but are not limited to working boats, offshore vessels, patrol boats, and yachts
Average load: up to 65 %

MAN Diesel & Turbo, 86224 Augsburg, Germany
Phone +49 821 322 1750, Fax +49 821 322 49 1750

MAN175D@mandieselturbo.com, www.175D.man.eu, www.marine.man.eu